

950 Hand Crank Adjustable Bench



REV. (042318P65)

IAC INDUSTRIES

3831 S BULLARD AVE., GOODYEAR, AZ 85338

Phone (714) 990-8997 Fax (714) 990-0557

www.iacindustries.com

950 HAND CRANK ADJ. HI

Assembly Instructions

Table Of Contents

Page #	
2	Pre-assembly Check List
3	WARNING of instability
4	950 Hand Crank Assembly Drawing
5-6	950 Hand Crank Adjustable Bench Instructions
7-8	ESD Grounding
8	Cleaning

ATTENTION NOTES:

IAC Industries takes great care in the packing of its products, however damage can occur during shipment. Check all packages and parts for any signs of damage. If damage is evident STOP and contact the carrier that delivered your order. Request a freight claim inspector to document the damage and begin the freight claim process.

Tools required to assemble your products are:

**7/16" and 1/2" wrench or socket with ratchet. Phillips screwdriver 8" long.
Utility knife. Safety glasses and light duty protective gloves.**

Power tools are NOT recommended unless they are equipped with a torque-limiting device which can limit the torque to 10-foot lbs maximum.


Unpack your order and separate like parts. Be careful not to damage parts as they are being moved into position. Also be sure all parts are removed from the packing materials before these materials are thrown away.

Locate the hardware kits and keep them in a central area. If the assembly is going to take more than one day, all individual hardware pieces should be returned to a central location.
Attention Notes (cont)

Check all parts and hardware kits against the itemized packing list found with the assembly instructions. If you believe there are parts missing from your order please contact IAC Industries customer service at 800-989-1422.



WARNING:

ALL PARTICLE BOARD USED IN IAC INDUSTRIES PRODUCTS ARE SOURCED ONLY FROM VENDORS THAT ARE CARB ATCM PHASE 2 AND TSCA TITLE VI COMPLIANT WITH VALID CERTIFICATES. Drilling, Sawing, Sanding or Machining Wood products can expose you to wood dust, a substance known to the state of California to cause cancer. Avoid inhaling dust generated from wood products or use a dust mask to other safeguards for personal protection. This product can expose you to chemicals, including formaldehyde, which is known to the state of California to cause cancer, and methanol, which is known to the state of California to cause birth defects or other reproductive harm. For more information please visit, www.P65WARNINGS.CA.GOV/WOOD. COPY OF VENDOR CERTIFICATE AVAILABLE UPON REQUEST.

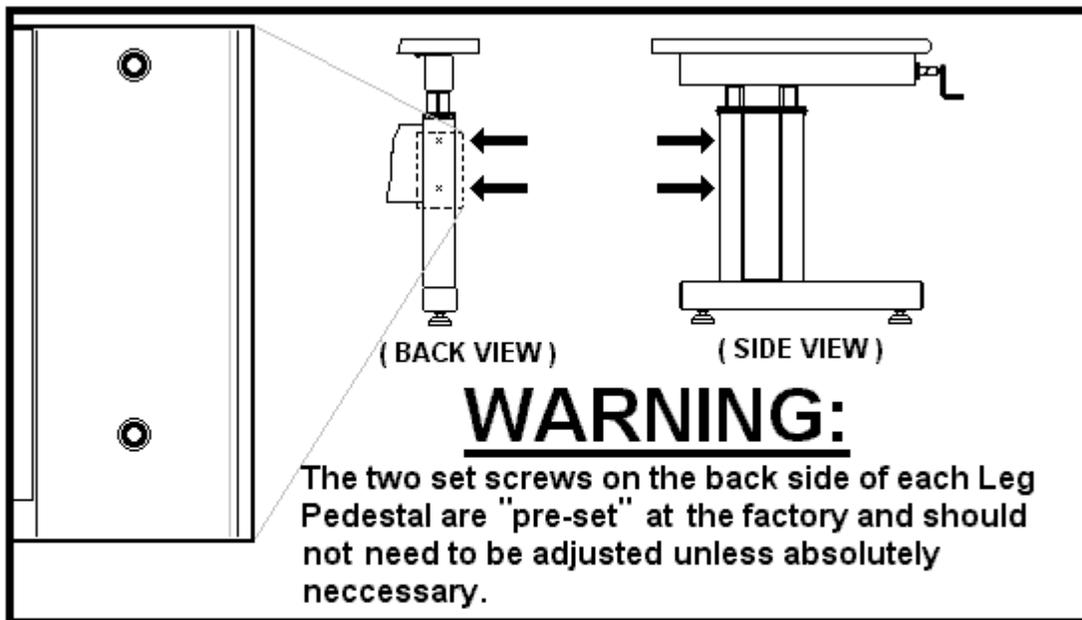

PLEASE NOTE:

If after the assembly of the bench with accessories you find that your bench is unstable (moves back and forth) at the higher positions, the following procedure should be used.

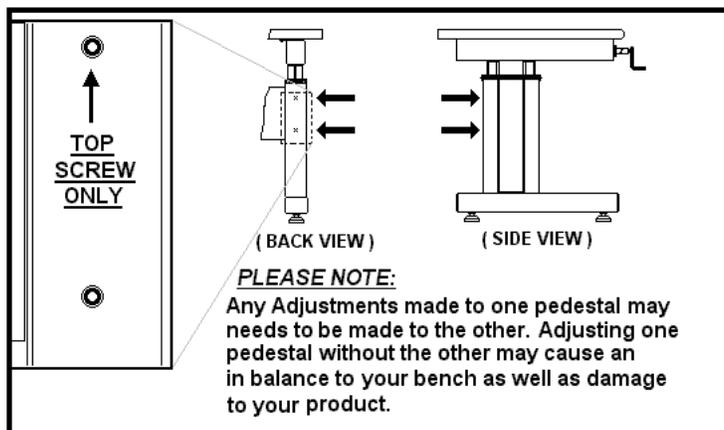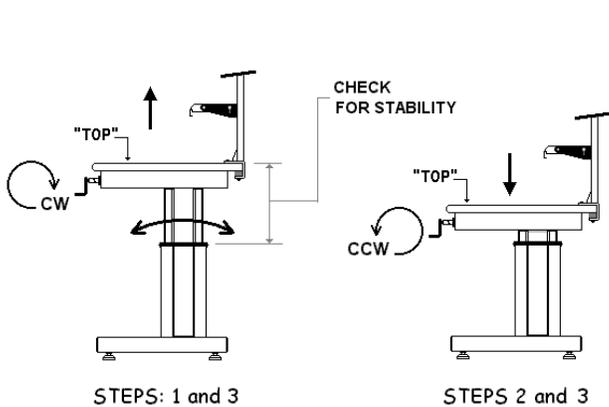

Step 1: With Accessories installed, crank the hand crank clockwise and between mid-point to highest point check to see if the top moves back and forth when the work surface is pushed (there will be some play, but it should be minimum)


Step 2: If top is stable, your top will not need any adjustments made. If you find that the top is unstable at the higher levels, lower the bench (counter clock wise) and using an Allen wrench to turn the top set screw **clockwise** 1/4 to 1/2 a turn only.

Please Note:

Make sure to check both pedestal legs when making adjustments. One may need more or less turns than the other pedestal leg.

Step 3: After adjusting both Pedestal legs repeat "Step 1" and check for both stability and that the top moves down as it is cranked down. If the top has trouble moving down, readjust the Top set screws CCW a 1/4 of a turn at a time until the bench rises and lowers evenly.

950 Bench Assembly Drawing (Figure 1)

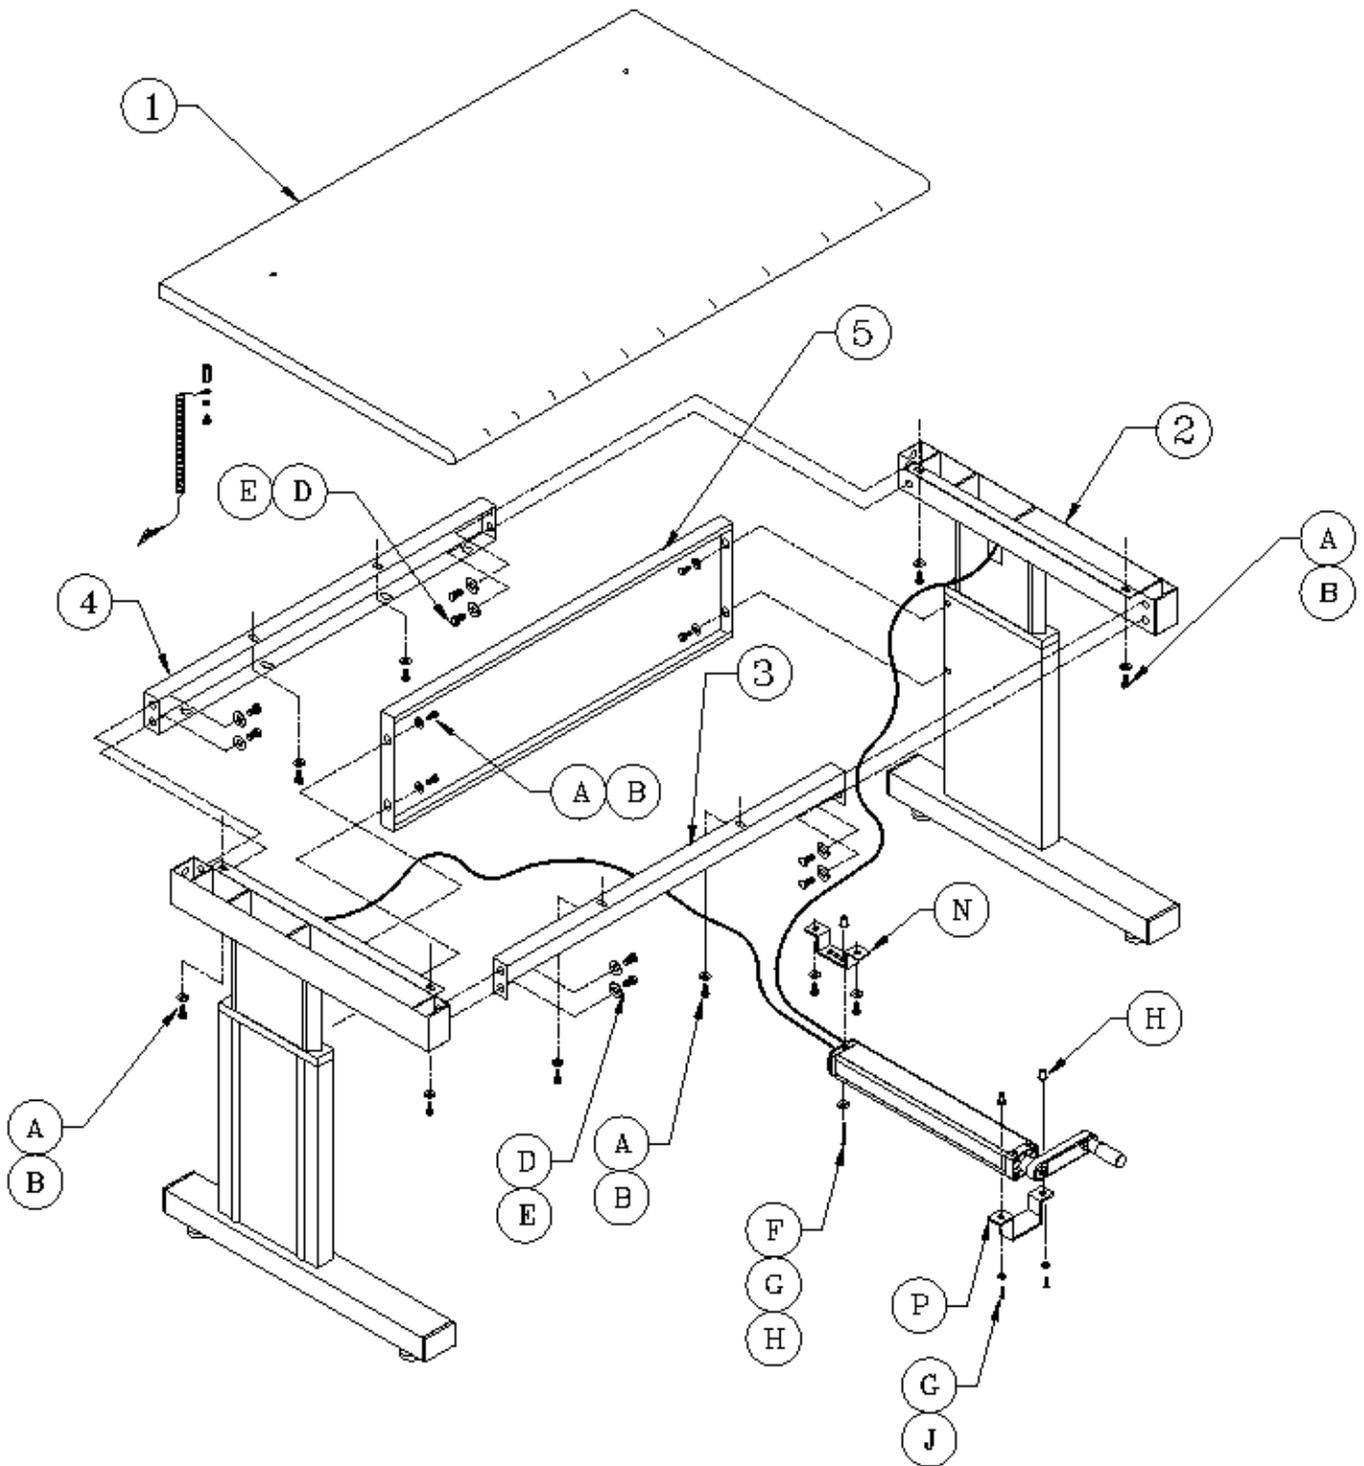


Parts List: 950 Hand Crank Adjustable Bench

(Ref. Figure 1)

Item	Description	Qty.	Item	Description	Qty.
1	Worksurface	1	F	Screw, 10-32x 3.00L PPH	1*
2	950 Leg Sub-Assy-Rt. & Lt.	1ea	G	Screw, 10-32x 1.00L PPH	2*
3	Front Support Beam 1.5H	1	H	Well Nut 10-32 Neoprene	3*
4	Std. Support Beam 3"	1	J	Flat washer # 10 ZINC	2*
5	950 Modesty Panel	1	K	Screw #6x1/2 PPH/SMS	4*
A	Hex Head Bolt 1/4-20x3/4	16*	L	Tie Mount, Plastic	4*
B	Flat washer 1/4	18*	M	Cable Tie 8"	4*
C	Nut 1/4-20 Hex HEPS	2*	N	Mounting Bracket-Rear 1.50H	1*
D	Hex Head Bolt 5/16-18x3/4	8*	P	Mounting Bracket-Front 2.09H	1*
E	Flat washer 5/16	11*			

* Hardware Kit – HWR 463

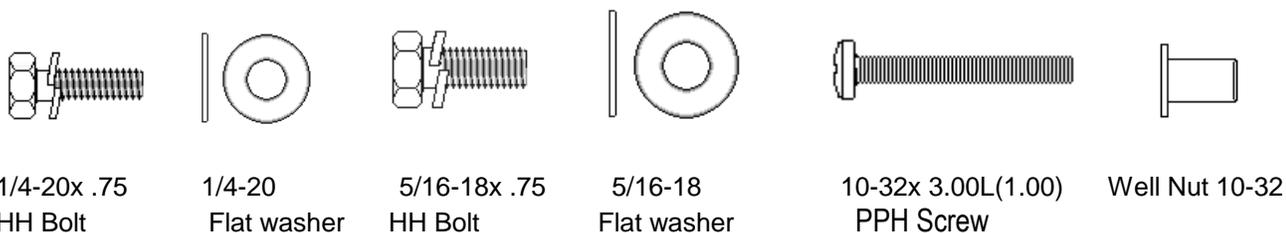

CAUTION: Do not operate hand crank cylinders without the weight of the worksurface on the frame. To do so may cause a vacuum in the lines and possible damage to the system. Be cautious to hold the leg assemblies together when turning workbench over after assembly making sure they do not separate.

Reference Assembly Drawing Above

1. Place worksurface (item 1) on clean surface underside facing up.
2. Loosely attach front and rear beams (items 3 & 4) to leg assemblies (item #2) using 5/16-18 x .75 Hex head bolts (item D) and 5/16 flat washers (item E).
3. Loosely attach modesty panel (item 5) to leg assemblies (item 2) using 1/4-20 x .75 hex head bolts (item A) and 1/4 flat washers (item B).
4. Align mounting slots in bench frame assembly with inserts in worksurface and attach using 1/4-20 x .75 hex head bolts (item A) and 1/4 flat washers (item B). Square the frame as much as possible and tighten the bench frame bolt first. Then tighten the bolts connecting the frame to the worksurface being careful not to over tighten.
5. Loosely attach hand crank rear mounting bracket (item N) to the rear of pump system using 10-32 x 3.00 phillips screw (item F), #10 flat washer (item J) and 10-32 well nut (item H) as shown in Figure 2 below. (Note: Mount to the most forward hole in the bracket as shown)

6. While the bench is upside-down raise the leg assemblies to their highest point by turning the hand crank clockwise. Secure hand crank pump hydraulic lines to underside of worksurface using cable mounts (items L), cable ties (items M) and #6x1/2 Phillips Screws (items K) being sure not to kink or damage the lines in anyway.
7. Lower the leg assemblies SLOWLY by turning the hand crank counter clockwise. If the leg assemblies do not lower apply pressure to them by pushing down on each leg. Once the leg assemblies are at their lowest level check to make sure the hydraulic lines are not kinked or pinched by the frame in anyway. Align the mounting slots in hand crank racket with inserts in worksurface and attach using 1/4-20 x .75 hex head bolts (item A) and 1/4 flat washers (item B) as shown in Figure 2 below.
8. Secure the front end of pump system to front beam using mounting bracket (item P) #10 flat washer (item J) and 10-32 well nut (item H) Figure 2. Tighten bolts and screws. (Note: Bracket is used to secure the pump to front beam)
9. When turning the bench assembly right side up be sure the leg assemblies DO NOT separate as this may cause damage to the hydraulic system. It may take as many as 4 people to turn bench over.
10. When moving bench into place, be sure to lift it by the bottom of the leg assemblies only. DO NOT lift it by the worksurface as this can cause damage to the hydraulic system.



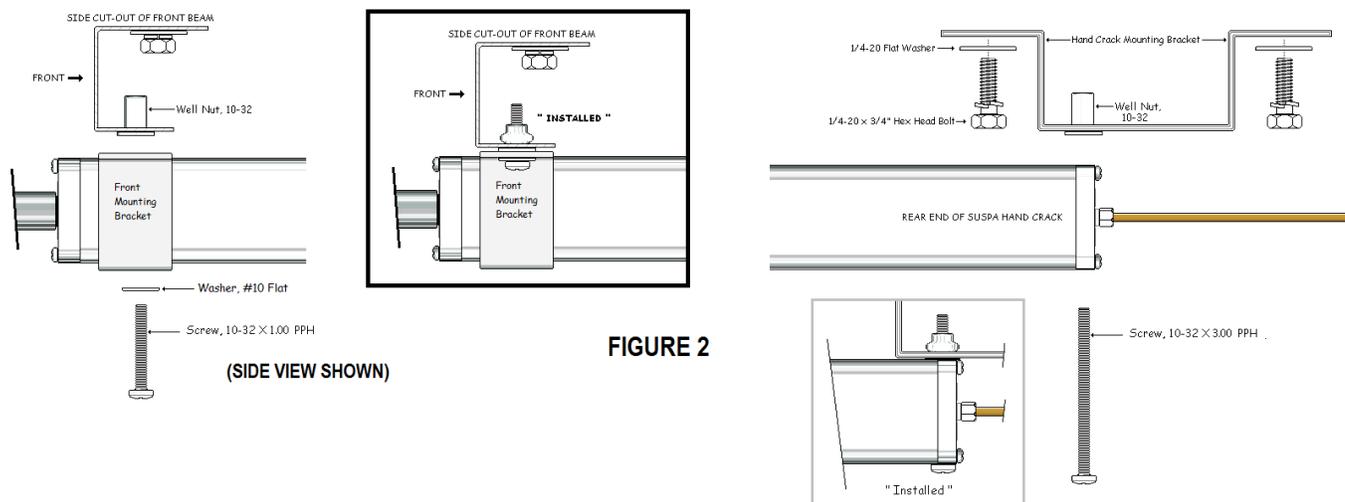


FIGURE 2

ESD GROUNDING:

HWR-014 ESD Hardware Kit

ESD refers to the OPTIONAL static dissipative laminate used on the bench. The laminate has a conductive under layer that comes in contact with the factory installed grounding bolts in the worksurface. The ESD grounding kit, including the 10 ft. grounding wire must be attached and the bench must be properly grounded to your facility earth ground. **(See below for grounding cautions!)** The eyelet slips over the bolt end and the alligator clip attaches to ground. When tested with a megohmmeter the ground bolts should test at $1 (1 \times 10^6)$ to $1000 (1 \times 10^9)$ in accordance with EOS/ESD standards prescribed in EOS/ESD document S4.1-1990 Worksurfaces-Resistive Characterization. For specific details on grounding the bench consult EOS/ESD document S6.1-1991 Grounding - Rec

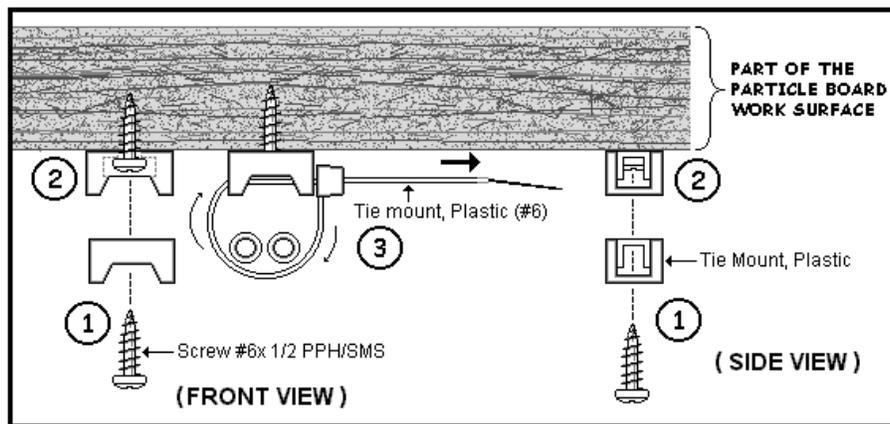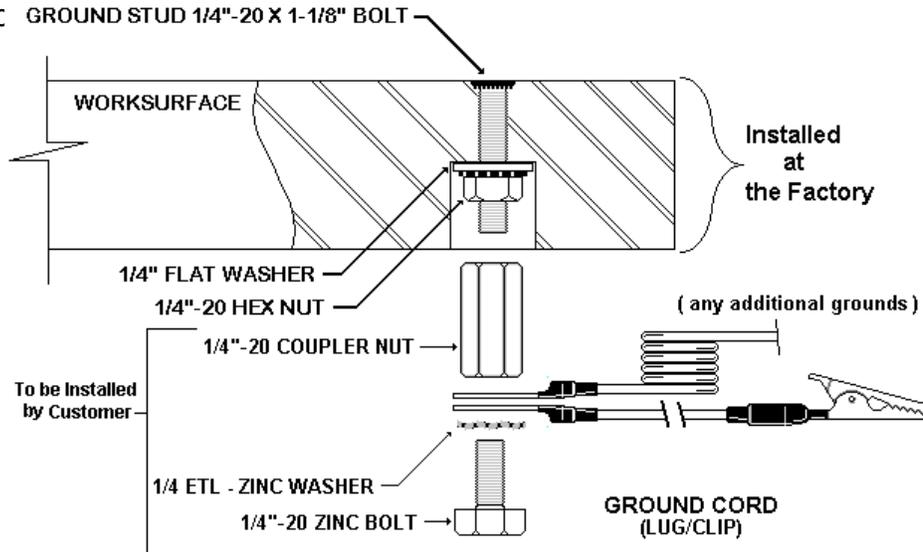

GROUNDING CAUTIONS:

- 1.) Ground each bench individually to ground, **NEVER** to each other in a continuous daisy chain.
- 2.) ISOLATED ground receptacles should not be used to derive an ESD ground.
- 3.) The green wire in a standard wall duplex can be used as a ground if it has been absolutely determined that the green wire is attached to earth ground in your facility, thereby providing a real earth ground.
- 4.) Each component of an ESD station should be connected to the same common ground point. In other words, use only ONE of the ground bolts as a path to ground. There are 2 installed for convenience only, or in the event you purchase a continuous resistance monitor.

Grounding Cautions (Continued)

5.) **DON'T use power tools** to install the nuts for the grounding kit. **HAND TIGHTEN ONLY.** If you attempt to 'spin' the ground bolt, the serrated teeth under the head of the bolt might strip the thin conductive layer.

NOTE: If benches are moved to another location, the ground bolts in the worksurfaces should be re-tested. Refer to EOS/ESD document S4.1-1990 Worksurfaces-Resistive Characterization for proper testing methods. If ground has been disturbed between the bolt and the static dissipative laminate, **DO NOT OVER TIGHTEN** ground bolts to achieve proper ground. If ground cannot be re-established, loosen nuts underneath bolt and remove ground bolt from hole. It may be necessary to hold the threads of the bolt with a small screwdriver in order to stabilize it to remove the nuts.

Paint a thin layer of **CONDUCTIVE ADHESIVE** or **CONDUCTIVE PAINT** on the small "ledge" of conductive laminate where the bolt head rests and underneath **THE HEAD** of the ground bolt. Set bolt back into the hole while liquid is still wet and test ground immediately. At the point ground is reestablished, let the liquid dry before reattaching the ground wire.

CLEANING:

Hard surface laminate is designed to resist abrasion, scuffing, scorching, hot solder, flux and most solvents. Intense exposure, such as from a hot soldering iron is not recommended. The surface cleans easily with a damp cloth and soapy water. A mild chemical cleaner with no abrasive can be used for stubborn spots. Remove glue and grease with a non flammable adhesive solvent such as 3M Scotch-Grip Solvent No. 4-F. Stains can be removed with a two minute exposure to a 5% hypo chloride bleach solution, followed by a clean water rinse. Never wax surface, as waxes may insulate.